


## DANOFORCE CATALYST

Powdered catalyst required for:  
DANOFORCE PRIMER +LT,  
DANOFORCE FLEX HP and  
DANOFORCE SEALER.

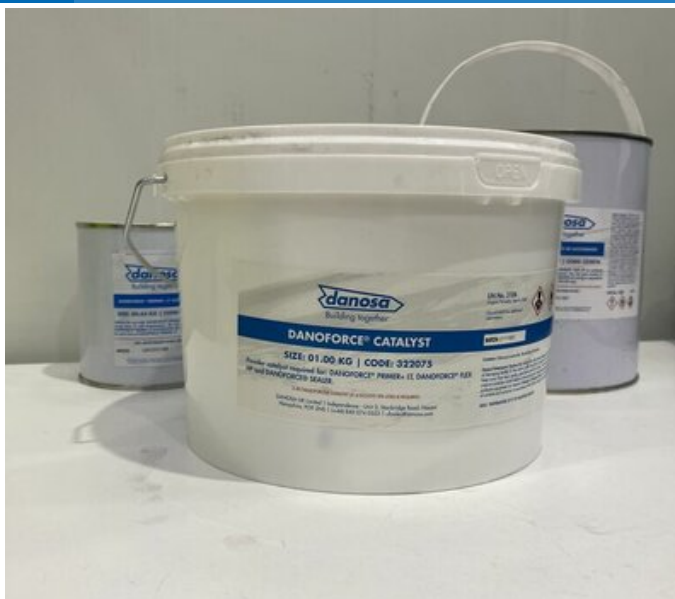

BBA 20/5743

A powder catalyst required for: DANOFORCE PRIMER +LT, DANOFORCE FLEX HP and DANOFORCE SEALER.  
2-4% required depending on air temperature. Refer to the Application Manual for complete catalyst guide.

### Presentation

- Weight (kg): 1
- Product code: 322075

### Technical Data

Concept	Value	Standard
---------	-------	----------