


ARGOSEC CAL ALBAICÍN

Mixed lime and cement mortar for rendering, plastering and rendering.

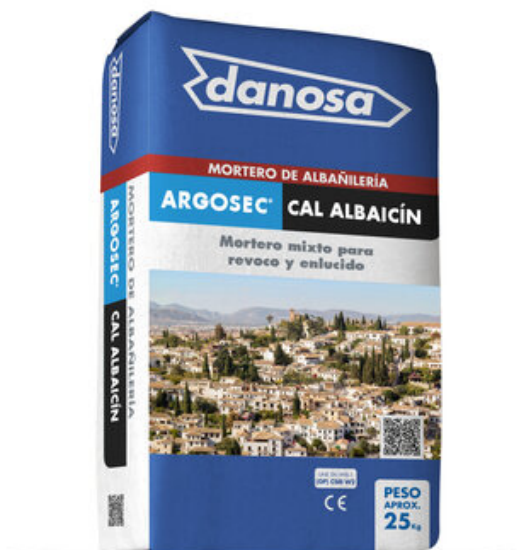

ARGOSSEC® CAL ALBAICÍN is a rendering mortar based on aerial lime (UNE EN 459) and white Portland cement, selected aggregates and organic additives that give it an extraordinary workability and adherence for on-site application.

Presentation

- Appearance: Powder
- Colour: White
- Weight (kg): 24.5
- Performance in mm thickness (kg/m²): Según uso
- Product code: 350082

Technical Data

Concept	Value	Standard
Mass per unit area (nominal) (kg/m ²)	25	-
Classification according to UNE EN 998-1	GP	-
Thermal conductivity declared (W/mK)	0.86	-
Bulk density (kg/L) _v ~ Value	1.60	-
Water vapour permeability (m)	≤ 10	-
Reaction to fire	A1	-

Scope

- Treatment of rising damp in walls.

Advantages & Benefits

- Excellent workability.
- A strong whiteness with no yellowing.
- Waterproofed
- Waterproof to rain water.
- Permeable to water vapour.
- Projectable.
- Thixotropic.

Descriptive Memory

The rendering of the walls will be carried out with dry mortar ARGOSEC® CAL ALBAICÍN, from the company DANOSA, class GP CSIII according to the UNE EN 998-1 standard. The substrate must be sound, clean, free of friable parts, completely hardened and have finished its time of dimensional variation. The construction joints shall be respected.

Support

- Mortar renderings.
- Brick or ceramic block factory.
- Concrete (treated with a bonding bridge).

Substrate preparation

- In case of heat, wind or on very absorbent substrates, it is advisable to dampen the substrate and wait for the water film to disappear.
- Do not apply on plasters or paints.
- The support must be healthy, clean, flat, free of paint, crumbling or poorly adhered parts, release agents, etc. and in general without any substance or particle that may prevent correct adherence.

Instruction for Use

- Mix ARGOSEC® CAL ALBAICÍN with 3.75 L of clean water per 25 kg bag manually or mechanically until a homogeneous, creamy, lump-free mixture is obtained.
- It can be applied to the substrate by machine or by hand, spread with a ruler, trowel and smooth or trowelled finish as required.
- Suitable for application in one coat or as a base coat and top coat.

Warning

- Store in a dry place, protected from rain, sun, high and low temperatures.
- Consult the safety data sheet.
- It is advisable to mesh the application at singular points.
- When applied at very high relative dampness, drying may be delayed.
- In case of splashes in the eyes, rinse with plenty of water and seek medical attention if necessary. For more detailed information see safety data sheet.
- Do not apply when there is a risk of rain or frost.
- Do not add more water once it has started to set.

- Comply with the mixing water.
- On very porous substrates prime with DANOPRIMER® RPU.

Handling, storage and preservation

- Shelf life of 12 months.
- Packed in multi-leaf paper bags with damp-proof sheets that allow for its proper storage for 12 months in its original sealed packaging, safe from dampness.

Safety and hygiene

- Consult the safety data sheet.

Notice

- The information contained in this document and any other advice provided, are given in good faith, based on DANOSA's current knowledge and experience when products are properly stored, handled and applied, in normal situations and in accordance with the recommendations of DANOSA. The information applies only to the application (s) and the product (s) to which reference is expressly made. In case of changes in the parameters of the application, or in case of a different application, consult the DANOSA Technical Service before using the DANOSA products. The information contained herein does not exonerate the responsibility of the building agents to test the products for the application and intended use, as well as their correct application in accordance with current legal regulations. The product images used in our communications are indicative and may differ slightly in color and aesthetic appearance in relation to the final product. Orders are accepted in accordance with the terms of our current General Sales Conditions. DANOSA reserves the right to modify, without prior notice, the data reflected in this documentation. Website: **www.danosa.com** E-mail: **info@danosa.com** Telephone: **+34 949 88 82 10**