


## ARGOSEC M-7.5

Bricklaying and plastering mortar



### Colors:

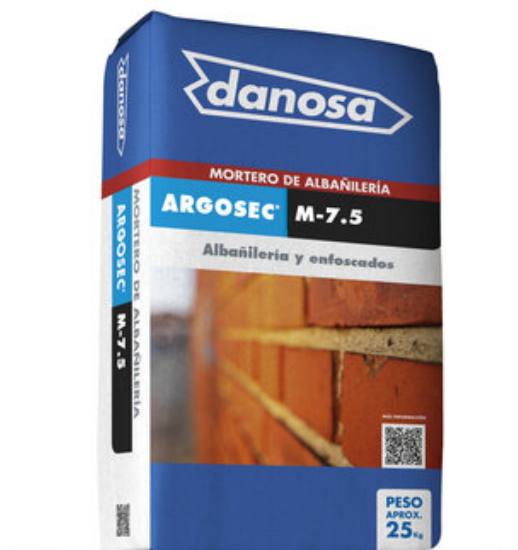

**Ivory**  
24.5Kg - 350095



**Grey**  
24.5Kg - 350084



**Yellow**  
24.5Kg - 350092



**White**  
24.5Kg - 350080

ARGOSEC M-7,5 is a masonry mortar based on Portland cement, selected aggregates and organic additives that give it an extraordinary workability and adherence for laying.

### Presentation

- Appearance: Powder
- Colour: Ivory
- Weight (kg): 24.5
- Performance in mm thickness (kg/m<sup>2</sup>): Según uso
- Product code: 350095

### Technical Data

Concept	Value	Standard
Mass per unit area (nominal) (kg/m <sup>2</sup> )	25	-
Capillary Absorption (kg/m <sup>2</sup> h <sup>0.5</sup> )	<6	-
Mixing water (%)	15	-
Classification according to UNE EN 998-1	GP	-
Thermal conductivity declared (W/mK)	0.86	-

Concept	Value	Standard
Chloride ion content (%)	<0,1% (en masa)	-
Bulk density (kg/L) <sub>v</sub> ~ Value	1.60	-
Grain size range (mm) ~ value	0/2	-
Reaction to fire	A1	-

## Scope

- Traditional masonry and rendering

## Advantages & Benefits

- Excellent workability.
- Exterior and interior use.

## Support

- Exposed brick walls.
- Brick or ceramic block factory.

## Substrate preparation

- The substrate shall be dry, clean, compact, free of dust and separating agents.

## Warning

- Store in a dry place, protected from rain, sun, high and low temperatures.
- Do not apply when there is a risk of frost, rain, strong wind or direct sunlight.
- Do not apply on frozen substrates, thawing or if imminent frost is expected.
- Do not re-mix or add water once it has started to harden.

## Handling, storage and preservation

- It is packaged in 25 kg multi-leaf paper bags with damp-proof sheets that allow it to be stored for 12 months in its original sealed packaging, safe from dampness.

## Notice

- The information contained in this document and any other advice provided, are given in good faith, based on DANOSA's current knowledge and experience when products are properly stored, handled and applied, in normal situations and in accordance with the recommendations of DANOSA. The information applies only to the application (s) and the product (s) to which reference is expressly made. In case of changes in the parameters of the application, or in case of a different application,

consult the DANOSA Technical Service before using the DANOSA products. The information contained herein does not exonerate the responsibility of the building agents to test the products for the application and intended use, as well as their correct application in accordance with current legal regulations. The product images used in our communications are indicative and may differ slightly in color and aesthetic appearance in relation to the final product. Orders are accepted in accordance with the terms of our current General Sales Conditions. DANOSA reserves the right to modify, without prior notice, the data reflected in this documentation. Website: **www.danosa.com** E-mail: **info@danosa.com** Telephone: **+34 949 88 82 10**

Document generated on 25/04/2024